

**Red Series**  
FRASplas Body-  
Fire Retardant  
Antistatic  
Construction -  
Safe for Explosive  
Environments-  
Atex M1 Rating



**Ebony Series**  
Noryl Body-  
Corrosive  
Resistant  
Internals- For  
Acids And Other  
Hazardous  
Liquids.

- Patented long life diaphragm & self-cleaning valve
- Low air consumption
- True lube-free & stall-free air motor: less sensitive to abrasive particles in the air supply and no oil emissions in the exhaust air
- Low weight due to light weight plastic & aeronautical design approach. No need for metal pumps
- Anti-icing: not affected by moisture in air line
- Large solids handling (over 3/8" on 1/2" pump)
- High suction lift (rated to 18' dry and 30' wet)
- Longer lasting air motor due to unique design and modular components that eliminate the need to replace the entire motor when worn.
- Conductive plastic (FRASplas) pumps are safe for explosive environments. Rated and certified to ATEX M1
- Low noise level


# Dual Diaphragm 1/2" Pump



## Ball Valve

“Pumps 2000” air operated dual diaphragm pumps were specifically designed for harsh mining duties and are guaranteed to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. Suitable for pumping applications in all industries.

## Performance Curve

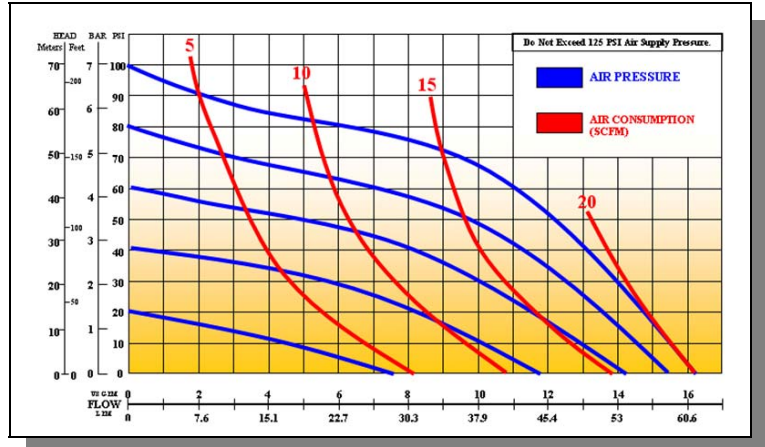

<b>FLOW RATE :</b>	0-16 gpm
<b>AIR PRESSURE :</b>	Up to 100 psi
<b>FLUID CONNECTION:</b>	1/2 inch (Internal Thread)
<b>AIR INLET PORT:</b>	1/2 inch (Internal Thread)
<b>EXHAUST PORT:</b>	3/4 inch (Internal Thread)
<b>DELIVERY PRESSURE :</b>	Tested to 87 psi
<b>SUCTION PRESSURE :</b>	Tested to 18 ft dry and 30 ft wet
<b>PARTICLE SIZE :</b>	Maximum 1/4 inch
<b>PUMP WEIGHT :</b>	9.9 pounds

MEGATOR Corp. /  
**PUMPS 2000 AMERICA**  
 1721 Main St.  
 Pittsburgh, PA 15215  
 Telephone: 412.963.9200  
 Toll-Free: 1.800.245.6211  
 Fax: 412.963.9214  
 E-mail: info@pumps2000america.com  
 www.pumps2000america.com

AVAILABLE FROM



IM1 c and II 1 GD c T6 0°C ≤ Ta ≤ 60°C  
 IM2 c and II 2 GD c T6 0°C ≤ Ta ≤ 60°C  
 Certificate No. Sira 06ATEX6006